





TYPICAL INSTALLATION

Important: Project measurements from the edge of the glass.


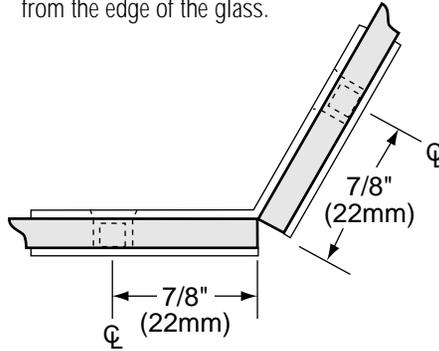


TEMPLATE OPTION FOR SQUARE CUT GLASS

5/8" (16mm) or 3/4" (19mm) Diameter Hole



5/8" (16mm) or 3/4" (19mm) Diameter Hole

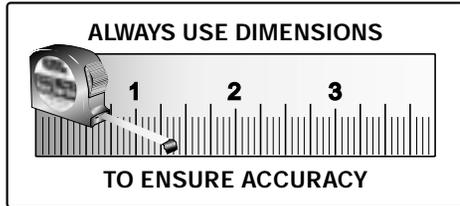

GLASS CLAMPS

THE TEMPLATE OPTIONS ON THIS PAGE APPLIES TO THE FOLLOWING CLAMPS:

135° Glass Clamp


CAT. No. GCB135

Junior 135° Glass Clamp

CAT. No. GCB635


Monaca Glass Clamp

CAT. No. MO635

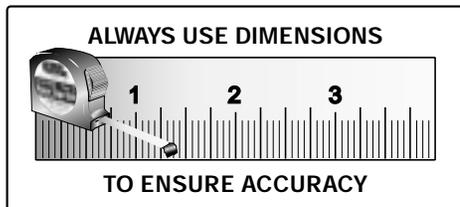

TYPICAL INSTALLATION

Important: Project measurements from the outside of the mitered glass.

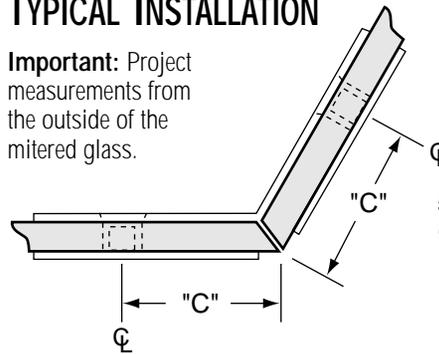


Glass Thickness	"C"* Measurement
1/4" (6mm)	1" (25mm)
5/16" (8mm)	1-1/16" (27mm)
3/8" (10mm)	1-1/16" (27mm)
1/2" (12mm)	1-1/8" (29.5mm)


*From outside edge of miter

TEMPLATE OPTION FOR 22-1/2° MITERED GLASS

5/8" (16mm) or 3/4" (19mm) Diameter Hole

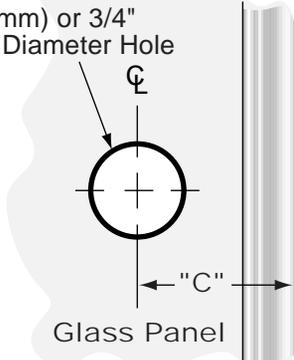

5/8" (16mm) or 3/4" (19mm) Diameter Hole

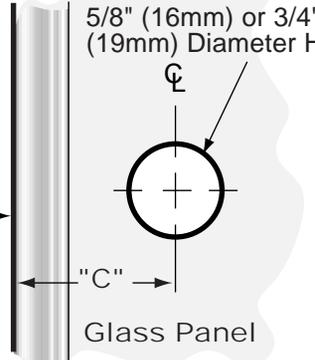

Outside Edge of Miter